


## UNITRONIC® LiYCY

Screened data transmission cable with colour code acc. to DIN 47100

UNITRONIC® LiYCY: Low-frequency PVC data cable DIN 47100 coded Flexible (0.34mm<sup>2</sup> multi-wire Maxi TERMI-POINT®) Flame retardant Screened, Instrumentation Control

### Info

CPR: Article number choice under [www.lappkabel.com/cpr](http://www.lappkabel.com/cpr)

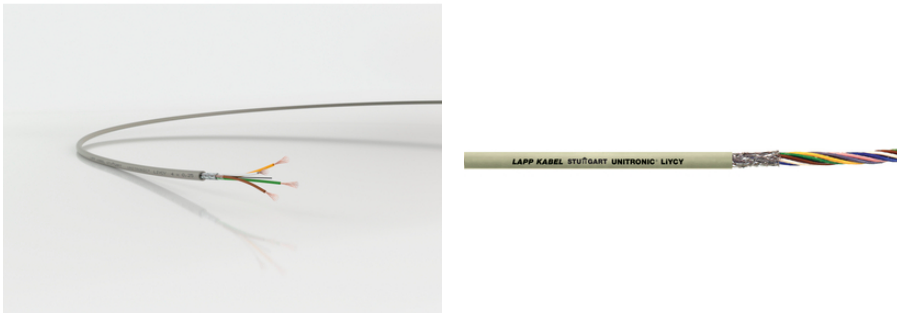

Interference signals

### Benefits

Overall braid minimises electrical interference  
Multifunctional application possibilities

### Application range

Screened cables with small dimensions are suitable for use in computer systems, instrumentation technology, office equipment, balances.  
Dry or damp rooms

### Product features

Flame-retardant according IEC 60332-1-2

### Norm references / Approvals

Based on VDE 0812

### Product Make-up

Fine-wire/multi-wire (0.34 mm<sup>2</sup>) strand made of bare copper wires  
Core insulation made of PVC  
Tinned-copper braiding

Last Update (20.12.2019)

©2019 Lapp Group - Technical changes reserved

Product Management [www.lappkabel.de](http://www.lappkabel.de)

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02\_03.16

## UNITRONIC® LiYCY

Outer sheath made of PVC  
Outer sheath colour: pebble grey (RAL 7032)

### Technical Data

Classification ETIM 5:	ETIM 5.0 Class-ID: EC000104 ETIM 5.0 Class-Description: Control cable
Classification ETIM 6:	ETIM 6.0 Class-ID: EC000104 ETIM 6.0 Class-Description: Control cable
Core identification code:	DIN 47100 without colour repetition, refer to Appendix T9
Mutual capacitance:	C/C: approx. 120 nF/km C/S: approx. 160 nF/km
Inductivity:	approx. 0.65 mH/km
Conductor stranding:	Stranded, fine-wire 0.34 mm <sup>2</sup> : 7-wire
Minimum bending radius:	Occasional flexing: 15 x outer diameter Fixed installation: 6 x outer diameter
Temperature range:	Occasional flexing: -5 °C to +70 °C Fixed installation: -40 °C to +80 °C

### Note

Unless specified otherwise, the shown product values are nominal values. Detailed values (e.g. tolerances) are available upon request.

Copper price basis: EUR 150/100 kg. Refer to catalogue appendix T17 for the definition and calculation of copper-related surcharges.

Please find our standard lengths at: [www.lappkabel.de/en/cable-standardlengths](http://www.lappkabel.de/en/cable-standardlengths)

Packaging size: coil ≤ 30 kg or ≤ 250 m, otherwise drum

Please specify the preferred type of packaging (e.g. 1 x 500 m drum or 5 x 100 m coils).

Photographs and graphics are not to scale and do not represent detailed images of the respective products.

Prices are net prices without VAT and surcharges. Sale to business customers only.

## UNITRONIC® LiYCY

Article number	Number of cores and mm <sup>2</sup> per conductor	Outer diameter [mm]	Copper index [kg/km]	Weight [kg/km]
UNITRONIC® LiYCY				
0034302	2 x 0.14	3.9	12	20
0034303	3 x 0.14	4.1	13	28
0034304	4 x 0.14	4.3	14.3	33
0034305	5 x 0.14	4.6	15.5	38
0034306	6 x 0.14	4.9	18.2	38
0034307	7 x 0.14	4.9	19	49
0034308	8 x 0.14	5.8	21.2	56
0034310	10 x 0.14	6.1	28.5	66
0034312	12 x 0.14	6.3	30.4	78
0034314	14 x 0.14	6.7	32	80
0034315	15 x 0.14	6.9	37.8	86
0034316	16 x 0.14	7	43	90
0034318	18 x 0.14	7.3	48.8	95
0034320	20 x 0.14	7.7	53.9	100
0034321	21 x 0.14	7.9	55.5	105
0034324	24 x 0.14	8.3	61	112
0034325	25 x 0.14	8.5	63	120
0034328	28 x 0.14	8.5	66.1	141
0034330	30 x 0.14	8.7	69	155
0034336	36 x 0.14	9.3	83	170
0034340	40 x 0.14	10.4	87.5	178
0034344	44 x 0.14	10.7	110.5	185
0034350	50 x 0.14	11.1	122.5	195
0034402	2 x 0.25	4.5	16	32
0034403	3 x 0.25	4.7	21	37
0034404	4 x 0.25	5	24	41.3
0034405	5 x 0.25	5.6	29	51.2
0034406	6 x 0.25	6	30	58
0034407	7 x 0.25	6	37	65
0034408	8 x 0.25	7.1	42	73
0034410	10 x 0.25	7.5	46	82
0034412	12 x 0.25	7.7	53	98
0034414	14 x 0.25	8	59	99

Last Update (20.12.2019)

©2019 Lapp Group - Technical changes reserved

 Product Management [www.lappkabel.de](http://www.lappkabel.de)

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02\_03\_16

Article number	Number of cores and mm <sup>2</sup> per conductor	Outer diameter [mm]	Copper index [kg/km]	Weight [kg/km]
0034415	15 x 0.25	8.3	61	111
0034416	16 x 0.25	8.4	64	119
0034418	18 x 0.25	8.8	83	125
0034420	20 x 0.25	9.3	88	136
0034421	21 x 0.25	9.6	93	161
0034425	25 x 0.25	10.7	114	172
0034428	28 x 0.25	10.8	126	181.1
0034432	32 x 0.25	11.4	138	203
0034436	36 x 0.25	11.8	148	220
0034440	40 x 0.25	12.7	157	248
0034450	50 x 0.25	13.8	178	318
0034461	61 x 0.25	15	205	365.2
0034502	2 x 0.34	4.9	21	37
0034503	3 x 0.34	5.1	27	42
0034504	4 x 0.34	5.7	28	52
0034505	5 x 0.34	6.2	30	60
0034506	6 x 0.34	6.8	45	64
0034507	7 x 0.34	6.8	48	75
0034508	8 x 0.34	7.8	52	94
0034510	10 x 0.34	8.3	74	105
0034512	12 x 0.34	8.5	80	123
0034514	14 x 0.34	8.9	86	154
0034515	15 x 0.34	9.2	90	155
0034516	16 x 0.34	9.4	94	160
0034518	18 x 0.34	10.2	103	173
0034520	20 x 0.34	10.7	112	192
0034521	21 x 0.34	11.1	116	199.2
0034525	25 x 0.34	11.9	135	259
0034528	28 x 0.34	12	153	280
0034530	30 x 0.34	12.3	159	291.1
0034532	32 x 0.34	13	165	305
0034536	36 x 0.34	13.4	179	331
0034540	40 x 0.34	14.8	200	365
0034550	50 x 0.34	15.9	235	431

Last Update (20.12.2019)

©2019 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

 You can find the current technical data in the corresponding data sheet.  
 PN 0456 / 02\_03\_16

Article number	Number of cores and mm <sup>2</sup> per conductor	Outer diameter [mm]	Copper index [kg/km]	Weight [kg/km]
0034602	2 x 0.5	5.6	29	47
0034603	3 x 0.5	5.9	38	55
0034604	4 x 0.5	6.3	43	70
0034605	5 x 0.5	7	51	90
0034606	6 x 0.5	7.6	59	104
0034607	7 x 0.5	7.6	65	112
0034608	8 x 0.5	8.7	70	120
0034610	10 x 0.5	9.3	88	139
0034612	12 x 0.5	9.6	99	177
0034618	18 x 0.5	11.8	134	239
0034620	20 x 0.5	12.1	149	276
0034625	25 x 0.5	13.7	211	352
0034630	30 x 0.5	14.5	230	397
0034702	2 x 0.75	6	38	53
0034703	3 x 0.75	6.3	49	65
0034704	4 x 0.75	7	58	79
0034705	5 x 0.75	7.6	67	109
0034707	7 x 0.75	8.2	100	156
0034710	10 x 0.75	10.5	130	187
0034712	12 x 0.75	10.8	154	218
0034718	18 x 0.75	13	195	327
0034725	25 x 0.75	15.3	280	454
0034730	30 x 0.75	15.8	312	486
0034802	2 x 1.0	6.3	43	72
0034803	3 x 1.0	6.8	56	90
0034804	4 x 1.0	7.3	68	109
0034805	5 x 1.0	8	79	126
0034807	7 x 1.0	8.6	118	171
0034810	10 x 1.0	11.1	140	228
0034812	12 x 1.0	11.4	168	259
0034818	18 x 1.0	13.4	252	389
0034825	25 x 1.0	16.2	335	517
0034902	2 x 1.5	7.1	58	90
0034903	3 x 1.5	7.5	74	115

Last Update (20.12.2019)

©2019 Lapp Group - Technical changes reserved

 Product Management [www.lappkabel.de](http://www.lappkabel.de)

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02\_03\_16

**UNITRONIC® LIYCY**

Article number	Number of cores and mm <sup>2</sup> per conductor	Outer diameter [mm]	Copper index [kg/km]	Weight [kg/km]
0034904	4 x 1.5	8.1	108	129
0034905	5 x 1.5	8.8	129	176
0034907	7 x 1.5	9.5	164	220
0034912	12 x 1.5	12.7	254	376
0034918	18 x 1.5	15.3	350	519
0034925	25 x 1.5	17.9	550	901

Last Update (20.12.2019)

©2019 Lapp Group - Technical changes reserved

Product Management [www.lappkabel.de](http://www.lappkabel.de)

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02\_03\_16